


## WHAT is Dulux® Professional® DryErase?

*Dulux Professional DryErase* is an innovative coating that is transforming the way people work and learn by turning a painted surface into an erasable canvas to collaborate, communicate and fully explore ideas.

*DryErase* is available in White, Clear and Black.

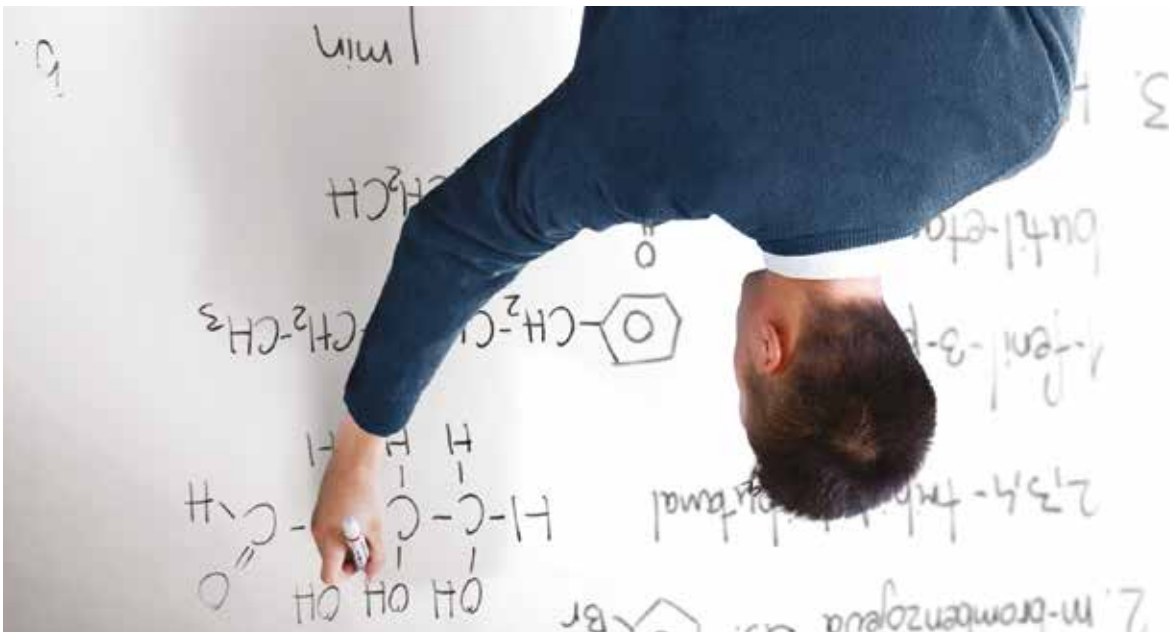

# The perfect solution



## DULUX CUSTOMER SERVICE

For further product or application advice or a Safety Data Sheet contact Dulux Customer Service AUST 13 23 77, NZ 0800 800 424. For special medical advice and emergencies call AUST 1800 033 111, NZ 0800 734 607.  
\*Dulux, Professional, Total Prep and the Squares Device are registered trade marks of DuluxGroup (Australia) Pty Ltd.  
The DryErase Device is a trade mark of DuluxGroup (Australia) Pty Ltd. Diggers is a registered trade mark of Recochem Inc.

**Dulux Australia**  
1956 Dandenong Road  
Clayton Victoria 3168  
Australia  
[www.dulux.com.au](http://www.dulux.com.au)

**Dulux New Zealand**  
150 Hutt Park Road  
Lower Hutt  
New Zealand  
[www.dulux.co.nz](http://www.dulux.co.nz)



Worth doing, worth Dulux®

laschool

lathome

lathwork



The perfect solution

Professional

**dryerase™**

**A CREATIVE  
SOLUTION FOR THE  
PROFESSIONAL**



**Dulux®**

1. Use a damp microfibre cloth (with mild soap and water)
2. Use a Whiteboard / glass cleaner and wipe off with a microfibre cloth
3. Use Diggers Isopropyl Alcohol and wipe off with a microfibre cloth

If ghosting marks remain on the surface after wiping with a microfibre cloth, try the following cleaning options – try first and if that is not successful work down the list:

#### **FOR GHOSTING FROM WHITEBOARD DRYERASE MARKERS/PENS**

Whiteboard markers can sometimes be difficult to remove when left on the surface for long periods of time. It is recommended that whiteboard markers are not left on the surface for more than 4 weeks. After this time it may be necessary to follow the cleaning advice given below.

**Note:** It is safe to use most dry erase style whiteboard markers on the surface. It is advisable to test novelty markers in an inconspicuous area first. Some novelty markers (for example "fluoro" markers) require wet-wipe removal. Please refer to the specific novelty marker instructions for removal.

**Do not use any other solvents as they may damage or affect the gloss level of the Dulux Professional DryErase coating and therefore its long term performance.**

Cleaning Advice

## WHERE can you use Dulux® Professional® DryErase

*Dulux Professional DryErase* is an innovative coating that turns a painted surface into an erasable canvas. It is a two part, roller applied paint that is suitable for use at school, at work or at home. An easy to apply two coat roller application over:

- ✓ Pre-painted surfaces
- ✓ Suitably prepared new surfaces

The product will only be as smooth as the surface it is painted on, so follow the detailed application instructions contained in this booklet.

When applying *Dulux Professional DryErase*, apply the product in 1 – 1.5 metre sections at a time and do not stretch the product beyond the coverage denoted on the box. Cut into the edges and around sockets and switches by using a small 4-5mm short nap microfibre roller.

**For areas up to 5m<sup>2</sup>:** Require one kit. Mix the whole kit. Use half the mixture for the first coat, allowing a minimum of 30 minutes dry prior to applying the second coat. The second coat must be applied within the 2 hour pot life of the product.

**For areas between 5m<sup>2</sup> to 10m<sup>2</sup>:** Requires two kits. Mix one kit and use this to apply one even first coat over the entire area (up to a maximum of 10m<sup>2</sup>). Allow a minimum of 30 minutes (or a max of 24 hrs) to dry prior to applying the second coat. A new roller sleeve and clean tray must be used for every applied 10m<sup>2</sup> or kit used.

**For areas greater than 10m<sup>2</sup>:** Determine the number of kits required by calculating the total area to paint and divide by 5m<sup>2</sup> (see example diagram given). Mix one kit and use this to apply one even first coat over the first 10m<sup>2</sup> area. Repeat this until all of the area being painted has one even first coat. A new roller sleeve and clean tray must be used for every applied 10m<sup>2</sup> or kit used. Allow a minimum of 30 minutes (or a max of 24 hrs) to dry prior to applying the second coat.

## WARNING!

Each kit of *Dulux Professional DryErase* is formulated to cover the m<sup>2</sup> specified. Stretching the product, or applying it too thin, will affect the appearance and performance of your *Dulux Professional DryErase* surface



### TO COMPLETE THE JOB YOU WILL NEED:



3x5m<sup>2</sup> kits

# Preparation Instructions

## FOR DULUX PROFESSIONAL DRYERASE

**Ventilate:** Open doors and windows to ensure good ventilation

For further product or application advice or a Safety Data Sheet contact Dulux Customer Service AUST 13 23 77, NZ 0800 800 424

PRODUCT	SURFACE TYPE	PREPARATION	TOPCOAT
<b>DRYERASE CLEAR COAT</b>	<b>New Surface</b>	Wipe with a clean dry cloth to remove any dust. Apply one coat of <i>Dulux Professional Total Prep</i> <sup>®</sup> , according to product instructions.  For set plaster apply <i>Dulux Sealer Binder</i> or <i>Dulux Professional Water Based Sealer Binder</i> followed by <i>Dulux Professional Total Prep</i> .	Prior to applying <i>Dulux Professional DryErase Clear</i> , apply a water based low sheen, semi-gloss, or gloss topcoat, in the colour of your choice, according to product instructions. Do not use an oil based topcoat.  <i>Dulux Professional DryErase Clear</i> performs best over a semi-gloss, or gloss finish. For the best performance of <i>Dulux Professional DryErase</i> do not paint over a flat or matte finish.
	<b>Pre-painted Surface</b>	If surface is in sound condition wipe with a clean dry cloth to remove any dust. No primer required. <b>For surfaces that require preparation:</b> <ul style="list-style-type: none"> <li>- Repair any divots, scratches, or bumps on the wall by filling them.</li> <li>- If the wall is textured, sand it smooth – or, for heavy texture use a level 5 finish.</li> <li>- Next apply one coat of <i>Dulux Professional Total Prep</i>, according to product instructions.</li> <li>- <i>Dulux Professional DryErase</i> will only be as smooth as the surface you apply it to.</li> </ul>	<i>Dulux Professional DryErase Clear</i> performs best over a semi-gloss, or gloss finish. For the best performance of <i>Dulux Professional DryErase</i> do not paint over a flat or matte finish.  Prior to applying <i>Dulux Professional DryErase Clear</i> , if required, apply a water based low sheen, semi-gloss or gloss topcoat, in the colour of your choice, according to product instructions. Do not use an oil based topcoat.
<b>DRYERASE WHITE COAT AND BLACK COAT</b>	<b>New Surface</b>	Wipe with a clean dry cloth to remove any dust. Apply one coat of <i>Dulux Professional Total Prep</i> <sup>®</sup> , according to product instructions.  For set plaster apply <i>Dulux Sealer Binder</i> or <i>Dulux Professional Water Based Sealer Binder</i> followed by <i>Dulux Professional Total Prep</i> .	<i>Dulux Professional DryErase White and Black</i> can be applied directly to properly primed surface.
	<b>Pre-painted Surface</b>	If surface is in sound condition wipe with a clean dry cloth to remove any dust. No Primer required, except when applying <i>Dulux Professional DryErase White Coat</i> over dark colours. For best coverage over dark colours apply one coat of <i>Dulux Professional Total Prep</i> before applying <i>Dulux Professional DryErase White Coat</i> . <b>For surfaces that require preparation:</b> <ul style="list-style-type: none"> <li>- Repair any divots, scratches, or bumps on the wall by filling them.</li> <li>- If the wall is textured, sand it smooth – or, for heavy texture use a level 5 finish.</li> <li>- Next apply one coat of <i>Dulux Professional Total Prep</i>, according to product instructions.</li> <li>- <i>Dulux Professional DryErase</i> will only be as smooth as the surface you apply it to.</li> </ul>	<i>Dulux Professional DryErase White and Black</i> performs best over a semi-gloss or gloss finish. For the best performance of <i>Dulux Professional DryErase</i> do not paint over a flat or matte finish.  Do not apply <i>Dulux Professional DryErase</i> over an oil based topcoat or primer.
<b>IMPORTANT</b>	Apply all precoats and topcoats with a 5-8mm nap roller sleeve for the least amount of roller stipple. Allow all coatings to fully dry for 24 hours prior to applying <i>Dulux Professional DryErase</i> .		

# Application Instructions

## DULUX PROFESSIONAL DRYERASE

Apply by roller. **DO NOT SPRAY**

**Ventilate:** Open doors and windows to ensure good ventilation

**Protect:** Follow all safety precautions outlined on the PART A and PART B cans.

For further product or application advice or a Safety Data Sheet contact Dulux Customer Service AUST 13 23 77, NZ 0800 800 424

MIX	APPLICATION	CLEAN UP AFTER APPLICATION	USE
<p><b>DO NOT SHAKE CANS</b></p> <ol style="list-style-type: none"> <li>1 Pour contents of Part B into Part A.</li> <li>2 Stir thoroughly with broad flat stirrer (provided) for <b>1 minute</b>.</li> <li>3 Loosely place the lid back on the can and wait for 2 mins before using.</li> </ol> <p>Once mixed you have 2 hours to apply.</p>	<p><b>YOU HAVE 2 HOURS TO APPLY</b></p> <ol style="list-style-type: none"> <li>1 <i>Dulux Professional DryErase</i> dries quickly. Apply in sections up to 1 metre wide by the entire height.</li> <li>2 Cut in edges using a small 4-5mm short nap microfibre roller.</li> <li>3 <i>Dulux Professional DryErase</i> is applied in a two coat process.           <p><b>For areas up to 5m<sup>2</sup>:</b> Pour half of the mixed product into the tray and apply the first coat of <i>Dulux Professional DryErase</i> over the area (up to 5m<sup>2</sup>) with the roller sleeve provided. The first layer should be a thin, consistent coat over the whole area being coated. Allow a minimum of 30 minutes for this first coat to dry. During this time, wrap the roller in a cling wrap plastic or foil to keep the roller moist. Also cover the tray with cling wrap plastic or foil to avoid it drying out or wipe the tray clean before adding remaining mixture. Pour remaining mixture into the tray and apply the second coat. The first coat may be slightly tacky after 30 minutes but can still be overcoated. The pot life will be 2 hours depending on conditions. Ensure that the 2 coats are completed within the pot life of the product.</p> <p><b>For areas between 5m<sup>2</sup> to 10m<sup>2</sup>:</b> Mix one kit and use this to apply one even first coat over the entire area (up to a maximum of 10m<sup>2</sup>). Allow a minimum of 30 minutes (or a max of 24 hrs) to dry prior to applying the second coat with a new fresh kit.</p> <p><b>For areas greater than 10m<sup>2</sup>:</b> Mix one kit at a time and use this to apply one even first coat over the first 10m<sup>2</sup> area. Use an additional kit for every 10m<sup>2</sup> until all of the area being painted has one even first coat. Allow a minimum of 30 minutes (or a max of 24 hrs) to dry prior to applying the second coat.</p> </li> <li>4 Be sure to overlap sections 5-10cms – and back-roll the overlap for complete, consistent coverage.</li> <li>5 Ensure a new roller sleeve (supplied) and new tray liner is used for every kit mixed or applied 10m<sup>2</sup> of product. This will avoid any possible cross contamination.</li> <li>6 Use good lighting when applying in order to ensure even coverage.</li> </ol>	<p>At the completion of your wall, any masking tape used should be removed immediately – ideally while <i>Dulux Professional DryErase</i> is still wet, and clean up.</p> <p>If you have drips on the carpet or skirting board, use water to clean those spots as soon as possible. For stubborn stains use Diggers Isopropyl Alcohol. If you get it on your hands wash immediately with soap and water.</p> <p>If you are unable to remove tape before <i>Dulux Professional DryErase</i> dries, score the edges with safety knife before removing the tape.</p>	<p>Allow 7 days to fully cure before using.</p> <p>Your finished <i>Dulux Professional DryErase</i> surface will have slight “orange-peel” texture; this is normal and will not affect the performance or erasability of <i>Dulux Professional DryErase</i>.</p> <p>It is safe to use most dry erase style whiteboard markers on the Dulux Professional DryErase surface.</p> <p>Do not use EXPO® pink whiteboard markers, red whiteboard crayons or Crayola® dry erase markers.</p> <p>It is advisable to test novelty markers in an inconspicuous area first. Some novelty markers (for example “fluoro” markers) require wet-wipe removal. Please refer to the specific novelty marker instructions for removal.</p> <p><small>Diggers is a registered trade mark of Recochem Inc. EXPO® is a registered trade mark of Newell Brands. Crayola® is a registered trade mark of Crayola.</small></p>
<p><b>IMPORTANT</b></p>	<p>Applying the <i>Dulux Professional DryErase</i> over a semi gloss or gloss acrylic coat will deliver the best holdout and maximise performance of the top coat. Only apply <i>Dulux Professional DryErase</i> with the supplied roller sleeve, ensuring you remove any lint before beginning.</p> <p>Use a new roller sleeve with each new kit and dispose of used sleeve.</p> <p>Use <i>Dulux Professional DryErase</i> in rooms that are maintained at temperatures between 20°C and 30°C and below 85% relative humidity.</p>		